Aufbauanleitung „PLAN X2“:

Regalstollen und -böden

Das mitgelieferte Befestigungsmaterial (Dübel und Schrauben) ist ausschließlich für die Befestigung von Bauteilen an Beton und/oder festem Mauerwerk geeignet. Bitte beachten Sie auch bei den Wandmontageelementen die max. Belastungswerte. Die Wandbeschaffenheit ist idealerweise bei Auftragserfassung zu erfragen und spätestens vor der Montage unbedingt von fachkundigem Personal zu prüfen. Bei abweichender Beschaffenheit (z. B. Leichtbauwänden) ist eine andere, der Belastung angemessene Befestigung bauseits vorzunehmen. Klären Sie elektrische Vorleistungen für Anschluss- und Gerätetechnik. Frei hängende Beleuchtungen erfordern Kabelkanallösungen auf oder unter Putz.

Diese Aufbauanleitung ist gültig für folgende Bestell-Nummern:
Stollen: D824 L/M/R, D825 L/M/R
Böden: D828 (5kg), D829 (5kg)

1. Die genaue Position für das Regal an der Zimmerwand festlegen.
Zweite Person dringend erforderlich!

2. Höhenversteller (Teile-Nr.50411) an der Stollenunterseite einsetzen. Höhenstellschraube muss mit seitlicher Bohrung am Stollen übereinstimmen. Gleitstopfen (Teile-Nr.50412) aufstecken (Siehe Abbildung 2).

3. Montage Stollen und -böden:

3.1. Tablarträger (Teile-Nr.50034) auf Stollen montieren (Siehe Abbildung 3 Schritt 1).

3.2. Stollen aufrichten, Böden von oben beginnend auf Tablarträger drücken (Siehe Abbildung 3 Schritt 2).

3.3. Alle Beschläge von unten unbedingt verschließen!

3.4. Unteren Boden im Bereich der Höhenstellschraube erst zum Ende der Montage einbauen.

3.5. Weitere Stollen und Böden montieren.

3.6. Höhenverstellung mit dem Inbusschlüssel (Teile-Nr.50810) über die Höhenstellschraube vornehmen bzw. korrigieren.

4. Montage Kippsicherung: Auf der Oberseite jedes Regalstollens das Set "Wandbefestigung" (Teile-Nr.50570) verwenden.

5. Zusatzartikel Böden mit Beleuchtung: → siehe Anschluss Beleuchtungsplan
Hinweis: Regalstollen und -böden haben rückseitig eine Kabelnute für eine verdeckte Kabelführung.

Achtung:
Alle Böden aus Gründen der Tragfähigkeit gleichmäßig ausrichten und belasten.
Bei Nichtverwendung der Kippsicherung gemäß Montageanleitung droht ein unbeabsichtigtes Umkippen der Regalstollen!

Abb. 1: Anordnung Stollen	Abb. 2: Montage Höhenversteller	Abb. 3. Montage Stollen und -böden
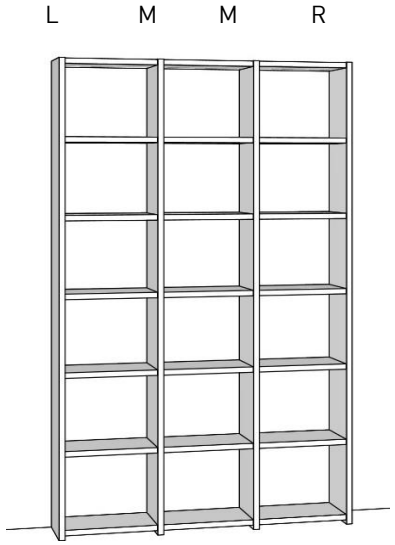	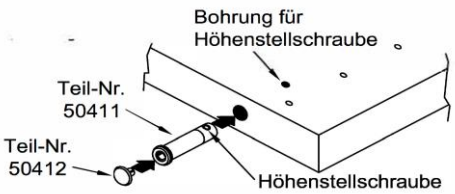	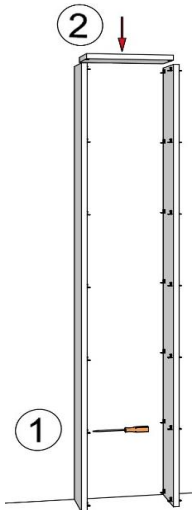

Alfons Venjakob GmbH Co. KG
Friedrichsdorfer Str. 220
33335 Gütersloh, Germany
E-Mail: venjakob@venjakob-moebel.de
Tel.: +49 52 09 5 92-0

Assembly instructions "PLAN X2":
Shelving units and shelves

The fixture materials provided with this product (dowels and screws) are only suitable for fixing parts to concrete and/or solid masonry. Please observe the maximum load that the wall-mounted elements can carry. If the condition of the wall is not suitable (e.g. if it is a lightweight partition wall), then another type of fixture suitable for the load that is to be carried should be used. Check the electrical input of any connection or device technology. Free-hanging light fixtures require cable duct solutions that are either on or under plaster.

These assembly instructions are valid for the following order numbers:
Side panel: D824 L/M/R, D825 L/M/R
Shelving unit shelf: D828 (5kg), D829 (5kg)

1. Mark out the exact position for the shelving on the wall.
Second person urgently required.

2. Place the height adjuster (Part No.50411) on the underside of the unit. The height adjustment screws must match up with the holes on the side of the units. Insert glider plug (Part No.50412), see fig. 2.

3. Unit and shelf assembly:

3.1. Mount the shelf supports (Part No.50034) on the units (see fig. 3 step 1).
3.2. Erect the units, then add the shelves by pressing them into place on the shelf supports, starting from the top (see fig. 3 step 2).
3.3. Make sure to secure all supports in place from below!
3.4. Only insert the bottom shelf in the area of the height adjustment screw at the end of the assembly.
3.5. Assemble the additional units and shelves.
3.6. Make or correct any height adjustments with the Allen key (Part No.50810) on the height adjustment screw

4. Assembly of anti-tip protection.
Use the "Wall fastening" set (Part No.50570) on the top side of each shelving unit.

5. Additional item, Shelf with lighting: → see lighting wiring diagram
Info: Shelving units and shelves have a cable groove on the back to help hide any cables

Please note: Align and load all shelfs evenly to ensure that the load-bearing capacity can be guaranteec
If the anti-tip device is not used in accordance with the assembly instructions, there
Is a risk of the furniture may tip over unintentionally!

Fig. 1: Arrangment of units	Fig. 2: Height adjuster assembly	Fig. 3: Unit and shelf assembly
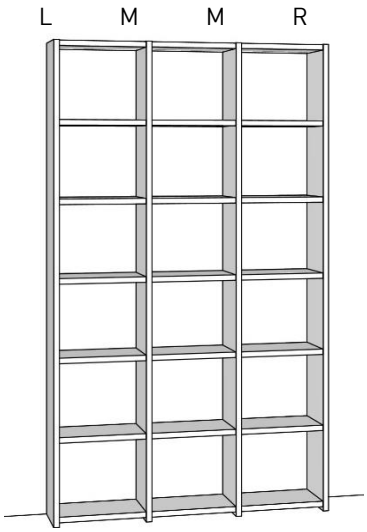	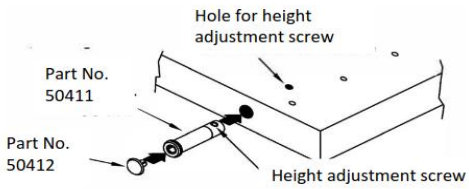	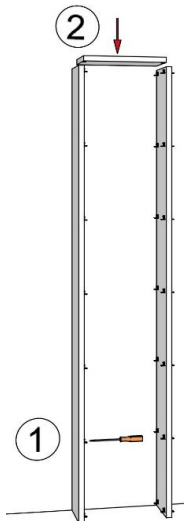

Alfons Venjakob GmbH Co. KG
Friedrichsdorfer Str. 220
33335 Gütersloh, Germany
E-Mail: venjakob@venjakob-moebel.de
Tel.: +49 52 09 5 92-0